




Plant	Hazardous Waste Treatment Plant
Customer	Jiangsu Changqing Agrochemical Group Co., Ltd
Start Up	2016
Fuel	Salty waste, Liquid waste, Solid waste, Polymer and Industrial sludge
Fuel Capacity	Salty waste: 40 t/d, Liquid waste: 28 t/d, Solid waste: 7 t/d, Polymer: 20 t/d, Industrial sludge: 10 t/d, Waste water: 3t/d
Incineration Type	Rotary kiln and second combustion chamber
Incineration Conditions	Acc. to Chinese regulation GB18484-2001
Steam Parameters	2.5 Mpa(g), 288°C
Steam Generation	12 t/h
Flue Gas Cleaning	SNCR+Quench+BHF+Scrubber+Absorber
Flue Gas Volume	28'500 Nm ³ /h



Plant	Hazardous Waste Treatment Plant
Customer	Northeast Pharmaceutical Co., Ltd
Start Up	2016
Fuel	Liquid waste, Solid waste, Pasty waste
Fuel Capacity	Liquid waste: 300 kg/h; Solid waste: 600 kg/h; Pasty waste: 300 kg/h
Incineration Type	Rotary kiln and second combustion chamber
Incineration Conditions	Acc. to Chinese regulation GB18484-2001
Steam Parameters	1.6 Mpa(g), 260 °C
Steam Generation	3.5 t/h
Flue Gas Cleaning	SNCR+Quench+BHF+Scrubber+Absorber
Flue Gas Volume	10'800 Nm ³ /h

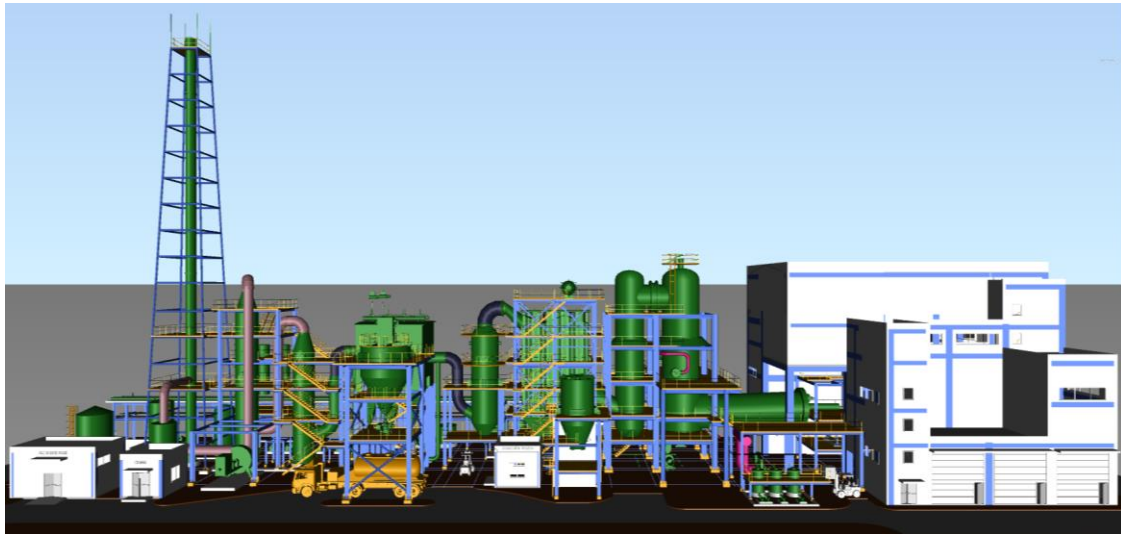

Plant	Nantong Qidong Integrated Solid Waste Treatment Centre
Customer	Nantong Guoqi Environment Technology Co., Ltd
Start Up	March 2018
Fuel	Solid waste and Liquid waste
Fuel Capacity	Solid waste 20'000 ton/year Liquid waste 5'000 ton/year
Incineration Type	Rotary kiln and second combustion chamber
Incineration Conditions	Acc. to European regulations/ Chinese regulation GB18484-2001
Steam Parameters	3.9 Mpa(g), 280°C
Steam Generation	8 t/h
Flue Gas Cleaning	SNCR+Quench+BHF+Scrubber+Absorber
Flue Gas Volume	34'000 Nm ³ /h